


RV Toilets

**Aqua-Magic®**  
**Residence, Style II**  
**Pedal Kit**

Made in the USA

**Thetford Corporation**

Ann Arbor, MI 1-800-543-1219 www.thetford.com

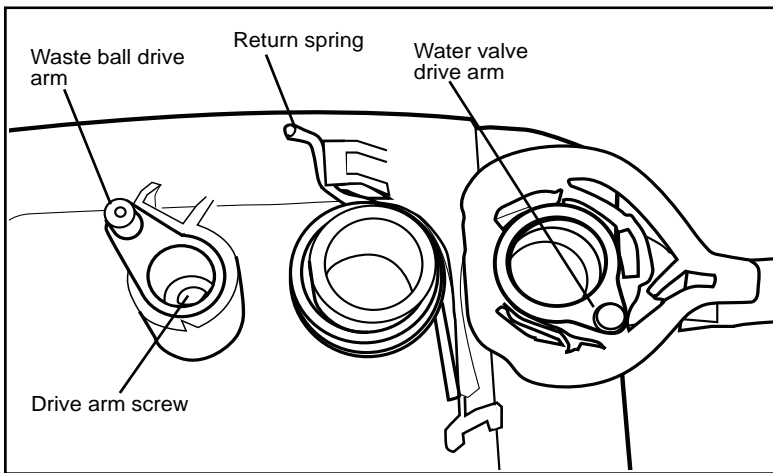

**FIGURE 1 - PEDAL REMOVED**

**Kit Contains**

- Pedal
- Closet flange seal
- Instruction sheet

**Needed**

- Towel(s)
- Plastic trash bag
- 1/2-inch wrench

**Before Beginning**

- Read all instructions completely.
- Reduce holding tank odor: Rinse toilet with water, drain holding tank, and add Thetford Holding Tank Deodorant.
- Wear protective gloves, glasses, long sleeves, and nose/face mask to avoid contact with human waste.
- Wash entire toilet thoroughly.
- Refer to Figure 1 for component locations



**NOTE: If you have sufficient clearance to remove and reinstall pedal and water valve with toilet in place, you can skip removing/reinstalling toilet.**

**Remove Toilet**

1. Turn off RV water supply per RV Owner's Manual.
2. Flush toilet to drain.
3. Place towel(s) behind toilet under water connection to catch water.
4. Disconnect RV water supply from toilet.
5. Remove Closet Flange Bolt Covers (if present) and Nuts.
6. Lift Toilet from floor and place on trash bag.
7. Cover holding tank opening with a towel.
8. Remove old closet flange Seal. Discard.

**Remove Old Pedal**


1. Lay Toilet on its side on floor with pedal facing upward.
2. Holding Bowl, grab front underside of Pedal. Pull Pedal up and off with a quick motion.

**Replace New Pedal**

1. (Fig. 2) Align Pedal onto Pedal Pivot. Align Pedal Return Spring Tab with Pocket A and rotate Pedal slightly until Drive Arm Pin aligns with Pocket B. Holding Pedal down, firmly hit button on outside of Pedal until Pedal snaps in place.
2. Place toilet upright. Activate Pedal several times to assure Waste Ball opens and closes completely.

**Reinstall Toilet**

1. Install new Closet Flange Seal, lip side down, on toilet.
2. Uncover holding tank opening and remove towel(s).
3. Place Toilet on floor, aligning mounting holes with closet bolts.
4. Tighten Closet Flange Nuts until toilet does not rock. Do not over-tighten.
5. Replace Bolt Covers (if present).
6. Connect RV water supply line to Toilet.
7. Turn on RV water supply.
8. Flush test Toilet, checking for leaks at all connections.

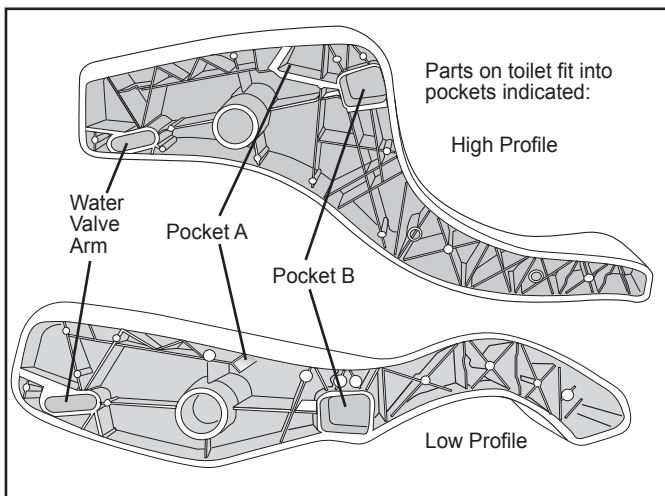

**FIGURE 2 - PEDAL REATTACHMENT**